PERFORMANCE MADE SMARTER

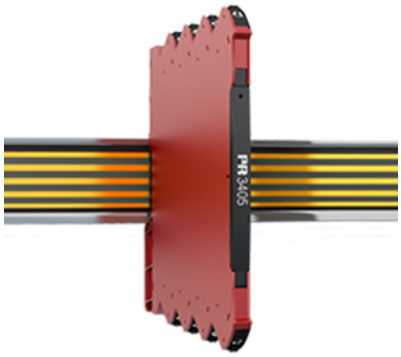

Power connector unit

3405

– Slimline housing of 6.1 mm
– Supplies DIN rail from supply terminals
– Can pass up to 2.5 A
– Up to 100 units can be powered

Applications
- Power can be connected to the DIN rail from supply terminals.
- Alternatively a powered DIN rail can supply power to the terminals.
- Installation in ATEX Ex zone 2 / IECEx zone 2 / FM division 2.
- Suitable for environments with high vibration stress, e.g. ships.

Technical characteristics
- 3405 can pass up to 2.5 A
- With 3405, up to 92 units can be powered (depending on the PR product type).

Applications

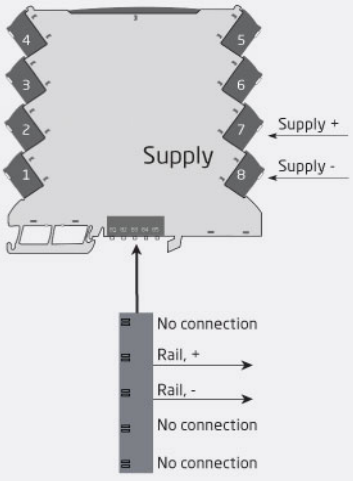

This page is automatically generated on the basis of information provided on www.prelectronics.com and affiliated websites. It is provided to you as a service and for information purpose only. While we have attempted to maintain the information as accurately as possible, the page may contain errors or omissions for which we disclaim any and all liability

Order:

Type
3405

Environmental Conditions

Operating temperature	-25°C to +70°C
Relative humidity	< 95% RH (non-cond.)
Protection degree	IP20

Mechanical specifications

Dimensions (HxWxD)	113 x 6.1 x 115 mm
Weight approx.	65 g
DIN rail type	DIN EN 60715/35 mm
Wire size	0.13...2.5 mm^2 / AWG 26...12 stranded wire
Screw terminal torque	0.5 Nm
Vibration	IEC 60068-2-6
2...25 Hz	±1.6 mm
25...100 Hz	±4 g

Common specifications

Supply

Supply voltage	16.8...31.2 VDC
Internal power dissipation	0.25 W (max.)
Required external fuse	2.5 A

I.S. / Ex marking

ATEX	II 3 G Ex ec IIC T4 Gc
IECEx	Ex ec IIC T4 Gc
FM, US	Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, AEx nA IIC T4
FM, CA	Cl. I, Div. 2, Gp. A, B, C, D T4 or Cl. I, Zone 2, Ex nA IIC T4

Observed authority requirements

EMC	2014/30/EU & UK SI 2016/1091
LVD	2014/35/EU & UK SI 2016/1101
ATEX	2014/34/EU & UK SI 2016/1107
RoHS	2011/65/EU & UK SI 2012/3032
EAC	TR-CU 020/2011
EAC Ex	TR-CU 012/2011

Approvals

ATEX	KEMA 10ATEX0147 X
IECEx	KEM 10.0068X
UKEX	DEKRA 21UKEX0055X
c FM us	FM17US0004X / FM17CA0003X
c UL us, UL 61010-1	E314307
EAC Ex	RU C-DK.HA65.B.00355/19
DNV Marine	TAA00001RW
CCC	2020322310003554