CATALOG NUMBER 1032

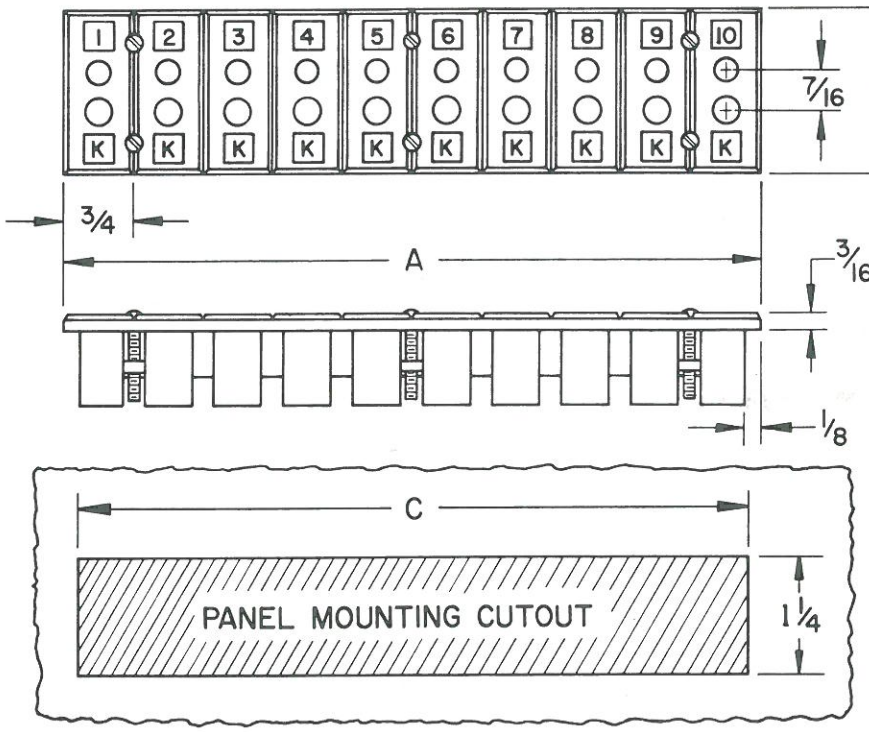

PANEL LENGTH "A"	NUMBER OF CIRCUITS	CUTOUT DIMEN. "C"
1 1/2	2	1 5/16
2 1/4	3	2 1/16
3	4	2 13/16
3 3/4	5	3 9/16
4 1/2	6	4 5/16
5 1/4	7	5 1/16
6	8	5 13/16
6 3/4	9	6 9/16
7 1/2	10	7 5/16
8 1/4	11	8 1/16
9	12	8 13/16

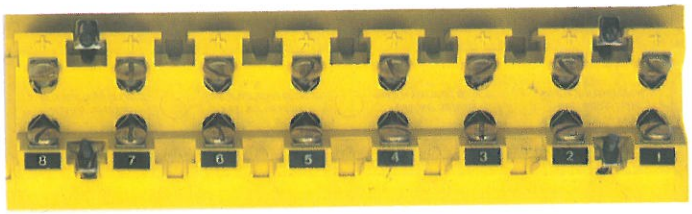

(BACK VIEW)

- Stripanels available 2 to 12 circuits - Color coded.
- For cutouts — Does not require mounting frame or mounting holes.
- Stripanels can be wired and installed completely from front. Patented self-contained fastening devise, "T Nut", is permanently attached, simplifies mounting, holds tight. Patent No. 3046516.
- Thermocouple type and circuit numbers are marked on face of Stripanel with corresponding circuit numbers and polarity identification on the back. Stripanels are numbered starting from "1" unless specified otherwise.
- Stripanels are molded of glass-filled thermoset compounds (will not melt) for high strength and dependability. The color coded panels will withstand ambient temperatures to 400° F (205° C) continuous and 500° F (260° C) intermittent. High-Temperature panels (All Hi-Temp panels are color coded red) will withstand ambient temperatures to 800° F (425° C) continuous and 1000° F (540° C) intermittent.
- Inserts are spring-loaded collet type to assure positive full contact with the negative insert larger making it virtually impossible to mismate.
- For corrosive application, gold plated contacts are available. Caution — system errors can result from use of plated contacts if significant thermal gradients exist.

SELF-CONTAINED FASTENING DEVICE

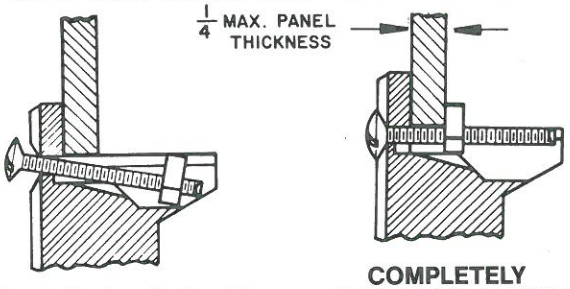

Ready for installation, T-nuts are out of the way at bottom of track.

COMPLETELY FRONT FASTENING
Screws accessible from the front draw T-nuts up molded track and hold them tight against back wall.

TYPE CODE	INSERT MAT'L. ALLOY		COLOR CODE
	POSITIVE	NEGATIVE	
J	IRON	CONSTANTAN	BLACK
T	COPPER	CONSTANTAN	BLUE
K	CHROMEL™	ALUMEL™	YELLOW
N	NICROSIL	NISIL	ORANGE
R	COPPER	#11 ALLOY	GREEN
S	COPPER	#11 ALLOY	GREEN
E	CHROMEL™	CONSTANTAN	VIOLET
U	COPPER	COPPER	WHITE
C	#405 ALLOY	#426 ALLOY	BROWN
(ALL HI-TEMP STRIPANELS)			RED

CONNECTORS
FULL SIZE — 2-POLE STRIPANEL®

STANDARD 2-POLE/ HI-TEMP 2-POLE		
CODE NUMBER	**PRICE**	
1032-2-(*)		
1132-2-(*)		
1032-3-(*)		
1132-3-(*)		
1032-4-(*)		
1132-4-(*)		
1032-5-(*)		
1132-5-(*)		
1032-6-(*)		
1132-6-(*)		
1032-7-(*)		
1132-7-(*)		
1032-8-(*)		
1132-8-(*)		
1032-9-(*)		
1132-9-(*)		
1032-10-(*)		
1132-10-(*)		
1032-11-(*)		
1132-11-(*)		
1032-12-(*)		
1132-12-(*)		

*TYPE CODE

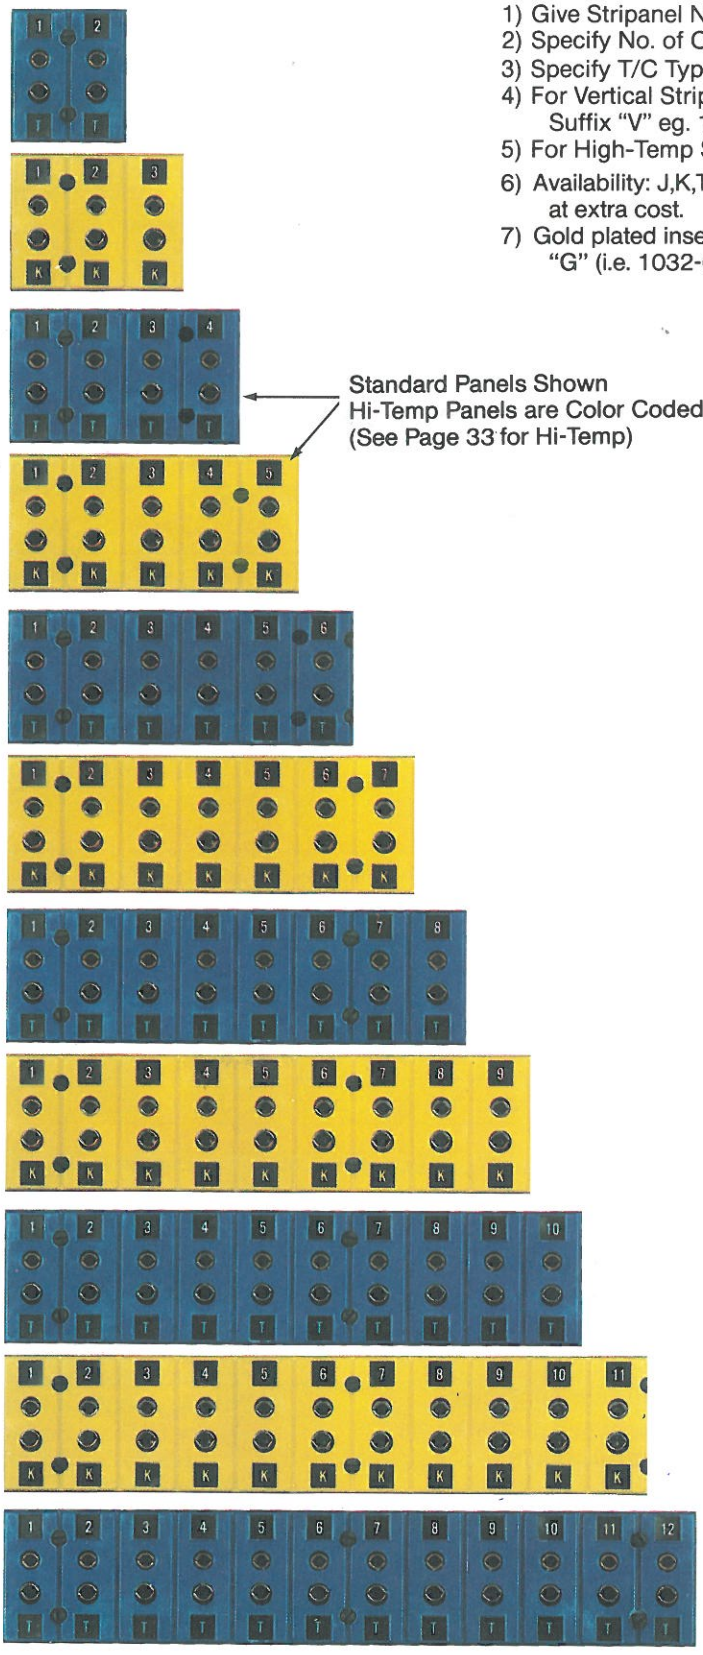

Standard Panels Shown
Hi-Temp Panels are Color Coded "RED"
(See Page 33 for Hi-Temp)

TO ORDER:
1) Give Stripanel No. 1032 - 6 - K
2) Specify No. of Circuits
3) Specify T/C Type by Code
4) For Vertical Stripanels Add Suffix "V" eg. 1032 - 6 - K - V
5) For High-Temp Stripanels: 1132 - 6 - K
6) Availability: J,K,T,N,E,R,S,U, also "C" at extra cost.
7) Gold plated inserts are available at extra cost. "G" (i.e. 1032-6-K-G).

THERMOCOUPLE TYPE	COLOR CODE
T	BLUE
J	BLACK
E	VIOLET
K	YELLOW
N	ORANGE
S	GREEN
R	GREEN
C	BROWN
U	WHITE
ALL HI-TEMP	RED