


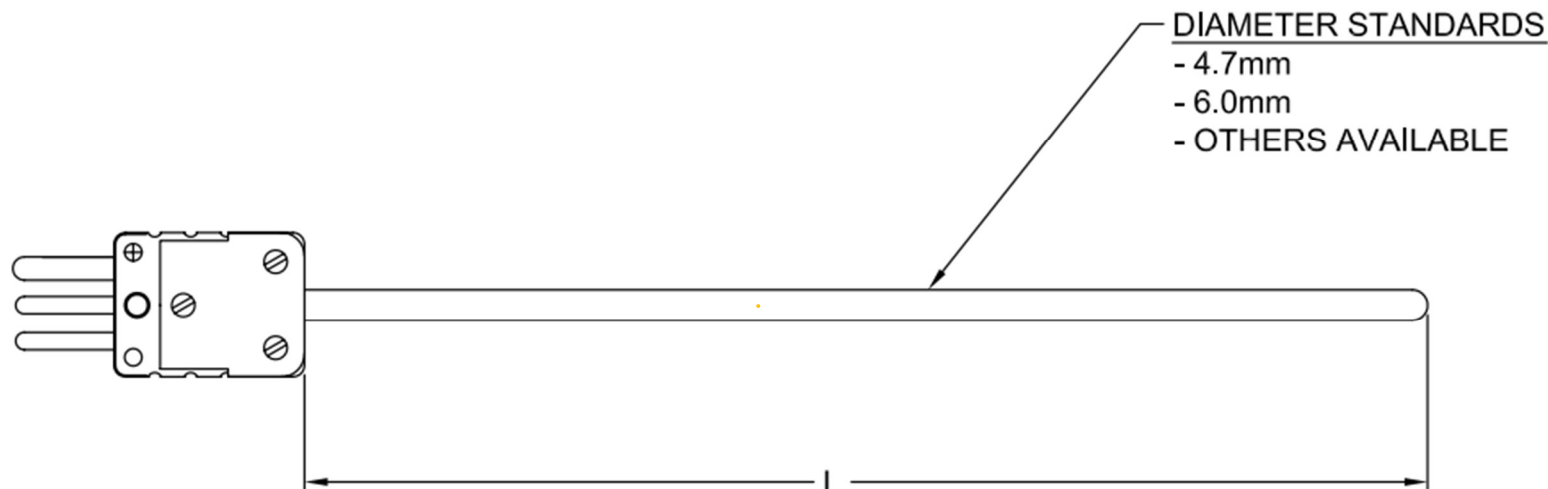

STANDARD CONSTRUCTION

- Element is Pt100, Class A, 260°C, 3-pin as standard. Please specify variations if required.
- Std operating temperature range is -50°C to 260°C
- Cold junction is rated to 100°C
- No process fitting (compression fittings can be supplied, please specify)
- Simplex construction
- Sheath is 316 grade stainless steel

ADDITIONAL REQUIREMENTS

If variations from the standard construction, or additional features are required, please specify.

Options include:

- Different RTD element
- Different temperature range
- Vibration proof
- High temperature cold junction requirements
- Uncompensated (two-pin plug)

STANDARD TOLERANCES:

0 - 1000	± 5
1000 - 2500	+ 5 / - 15
2500 +	± 1.5 %

ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED

This drawing remains the property of ECEFast. It is subject to recall, and must not be reproduced in part, or in whole, or its contents passed to third parties without prior written consent.



1800 811 818 MELBOURNE
www.ecefast.com.au SYDNEY
BRISBANE

0 800 ECE FAST
www.ecefast.co.nz AUCKLAND (NZ)

TEMP SENSOR
TYPE Pt100
MINI PLUG - COMPENSATED
NO PROCESS FITTING

ECE Template No.

TS-19P-CAT

Units: mm

Scale: NTS