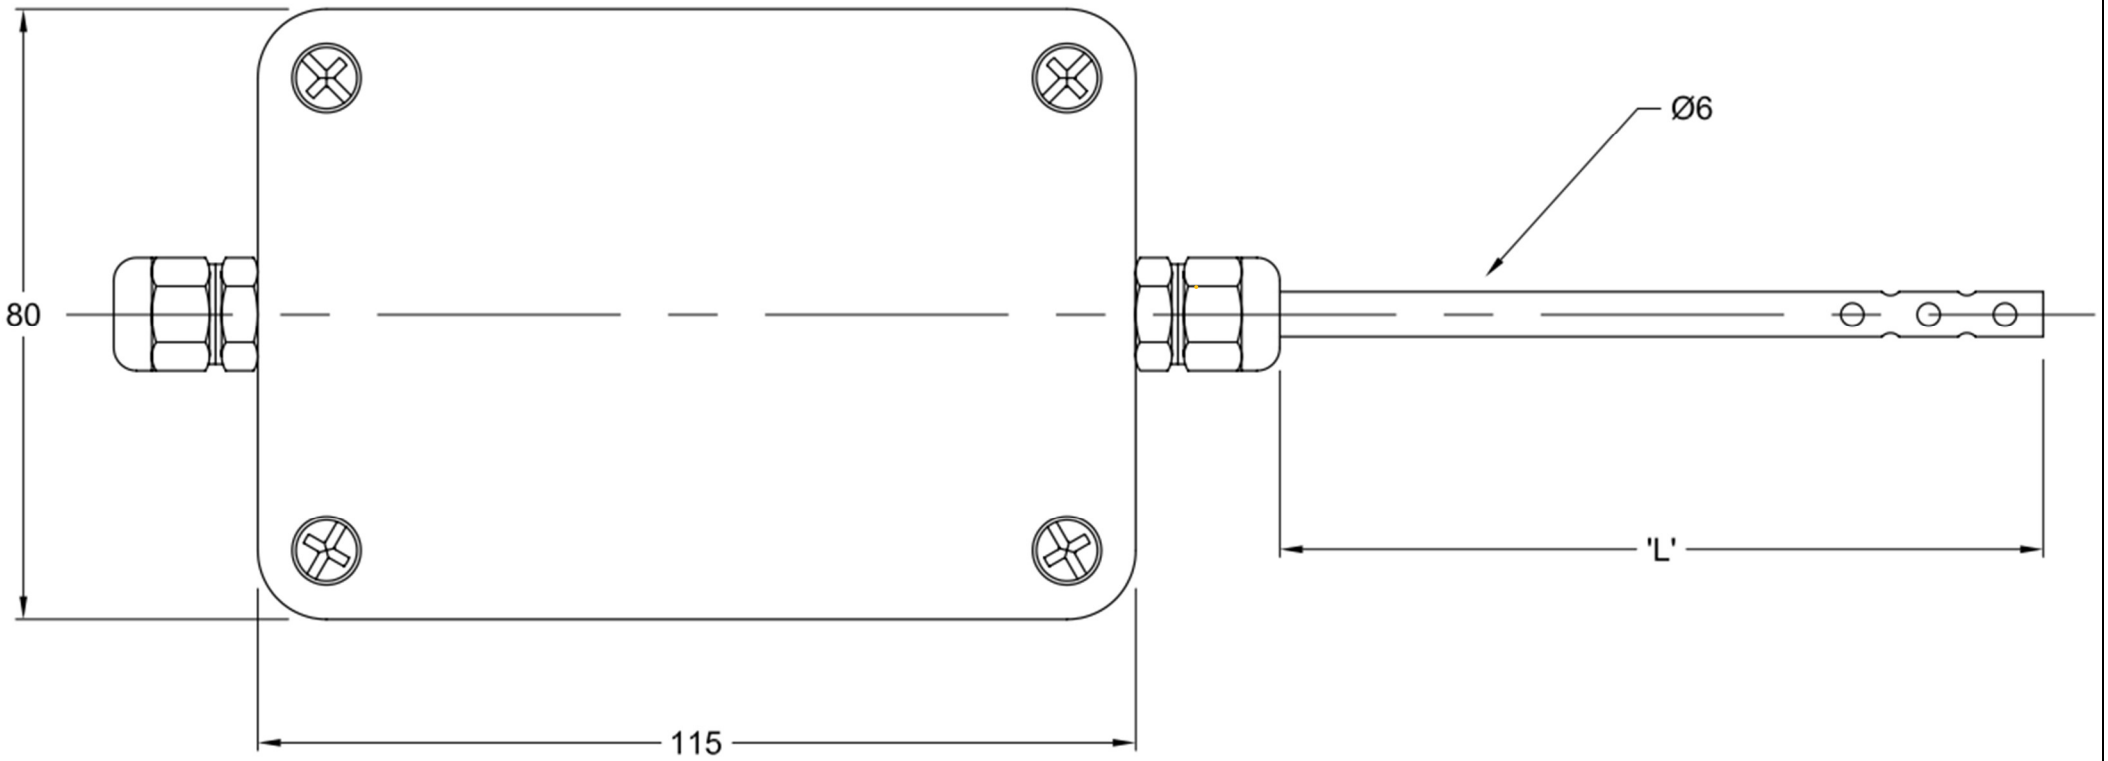

STANDARD CONSTRUCTION

- RTD, Band 1 element, 3 wire construction
- Length up to 200mm in increments of 50mm
- Rated to 125°C
- No process fitting

ADDITIONAL REQUIREMENTS

If variations from the standard construction are required please specify. Options include:

- Band 5 element
- 4 wire construction
- 4 to 20 mA OUTPUT

STANDARD TOLERANCES:

0 - 1000	± 5
1000 - 2500	+ 5 / - 15
2500 +	± 1.5 %

ALL DIMENSIONS IN mm UNLESS OTHERWISE SPECIFIED

This drawing remains the property of ECEFast. It is subject to recall, and must not be reproduced in part, or in whole, or its contents passed to third parties without prior written consent.

ECE Temperature made simple

1800 811 818 MELBOURNE
www.ecefast.com.au SYDNEY
BRISBANE

0 800 ECE FAST
www.ecefast.co.nz AUCKLAND (NZ)

TEMP SENSOR

TYPE Pt100
AIR TEMP PROBE
NO PROCESS FITTING

ECE Template No.

TS-51P-CAT

Units: mm | Scale: NTS