PERFORMANCE MADE SMARTER

Universal trip amplifier

4179B

– Measures AC current and voltage signals
– Output: 2 relays
– Programming, process monitoring and diagnostics via PR 4500
– Universal power supply 21.6…253 VAC / 19.2...300 VDC

Functional highlights

- The 0... 5 AAC RMS range makes it possible to accurately measure a typical current transformer.
- The 0...300 VAC RMS range allows accurate supply voltage monitoring.
- The device measures standard input ranges and can be freely configured to customer-defined input range.
- Process control with 2 pairs of potential-free relay contacts which can be configured to suit any application.
- Trip amplifier with window function allowing the relay to change state within a high and a low setpoint on the input span.
- Simulation of process value during commissioning / maintenance.
- All terminals are over-voltage protected, polarity protected and short-circuit protected.
- The 4179B provides the required failure data (SFF and PFDAVG) for SIL 2 applications as per IEC 61508 / IEC 61511.
- Failure rates for 4179B correspond to Performance Level “d” according to ISO-13849.

Technical characteristics

- Accuracy < 0.3% of span.
- Temperature coefficient 0.01% / °C.
- Response time < 0.75 s for measuring AC current / voltage signals.
- High galvanic isolation of 2.3 kVAC.
- Extended EMC immunity: NAMUR NE21, A criterion, burst.
- Functional safety: HW assessment, SFF > 90%.

Programming

- Configuration, monitoring and diagnostics using PR 4500 detachable communication interfaces. Product-specific functionality includes communication via Modbus and Bluetooth using our PR Process Supervisor (PPS) application, available for iOS and Android.
- All programming can be password protected.
- Scrolling help text in 7 languages.

Mounting / installation

- Units can be mounted side by side, horizontally and vertically, without air gap on a standard DIN rail, even at 60°C ambient temperature.

Note

- If you need an installation instruction in hard copy, you can order it for free when placing your order.

Applications

Input signals:

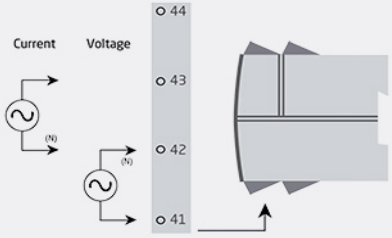

Output signals:



Power connection:



This page is automatically generated on the basis of information provided on www.prelectronics.com and affiliated websites. It is provided to you as a service and for information purpose only. While we have attempted to maintain the information as accurately as possible, the page may contain errors or omissions for which we disclaim any and all liability

Order:

Type
4179B

Environmental Conditions

Operating temperature	-20°C to +60°C
Storage temperature	-20°C to +85°C
Calibration temperature	20...28°C
Relative humidity	< 95% RH (non-cond.)
Protection degree	IP20
Installation in	Pollution degree 2 & meas. / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD)	109 x 23.5 x 104 mm
Dimensions (HxWxD) w/ PR 4500	109 x 23.5 x 131 mm
Weight approx.	155 g
DIN rail type	DIN EN 60715/35 mm
Wire size	0.13...2.08 mm^2 AWG 26...14 stranded wire
Screw terminal torque	0.5 Nm
Vibration	IEC 60068-2-6
2...13.2 Hz	±1 mm
13.2...100 Hz	±0.7 g

Common specifications

Supply

Supply voltage, universal	21.6...253 VAC, 50...60 Hz or 19.2...300 VDC
Internal fusible resistor	< 80 s, 2.4 A
Max. required power	1.2 W
Max. power dissipation - current measurement	2.2 W
Max. power dissipation - voltage measurement	1.2 W

Isolation voltage

Test voltage	2.3 kVAC
Input to any (working)	250 VAC (reinforced)
Relay to relay (working)	125 VAC (reinforced)

Response time

Response time (0...90%, 100...10%)	< 0.75 s
Signal dynamics, input	20 bit
Bandwidth	40…400 Hz
Programming	PR 4500 communication interfaces
EMC immunity influence	< ±0.5% of span*
Extended EMC immunity: NAMUR NE21, A criterion, burst	< ±1% of span*
of span	= of selected standard range

Input specifications

Current input

Signal range	0...5 AAC / 40...400 Hz
Maximum input limit	6.00 AAC @ 40°C
Programmable measurement ranges	0...0.5; 0…1; 0…2.5 & 0...5 AAC
Custom configurable signal range	0...5 AAC /40...400 Hz
Min. measurement range (span)	0.5 AAC
Input resistance	< 0.042 Ω (incl. terminals)

Voltage input

Signal range	0...300 VAC / 40...400 Hz
Programmable measurement ranges	0...0.5, 0...1, 0...2.83, 0…5, 0…120, 0…230 & 0…300 VAC
Custom configurable signal range	0...300 VAC / 40...400 Hz
Min. measurement range (span)	0.5 VAC
Input resistance	Nom. 3 MΩ || 100 pF

Output specifications

Relay output

Relay functions	Setpoint, Window, Error indication, Latch, Power and Off
Hysteresis	0...100%
ON and OFF delay	0...3600 s
Power On delay	0...9999 s
Max. voltage	250 VAC / VDC
Max. current	2 A
Max. AC power	500 VA
Max. DC current, resistive load ≤ 30 VDC	2 ADC
Max. DC current, resistive load > 30 VDC	See manual for details

Observed authority requirements

EMC	2014/30/EU & UK SI 2016/1091
LVD	2014/35/EU & UK SI 2016/1101
RoHS	2011/65/EU & UK SI 2012/3032

Approvals

c UL us, UL 508	E248256
SIL	Hardware assessed for use in SIL applications